

GREASE GP

GENERAL PURPOSE, HIGH PERFORMANCE LUBRICANT

Description:

A soft, tacky, red grease with a lithium 12 hydroxy stearate soap, formed in a special blend of highly refined oils, with additives to enhance its adhesive power, its extreme pressure performance and its anti-oxidation and anti-corrosion properties.

Application:


GREASE GP is an extremely versatile lubricant, that has been designed for high performance in a wide range of operating temperatures and working conditions. It can be used on all types of plain and rolling element bearings. It will withstand high loads and vibration. It has good water washout resistance. Its use will extend bearing life and reduce costly downtime.

Typical physical properties:

Appearance:	Soft red grease.
Basis:	87 % refined mineral oils, 9 % lithium base soap.
NLGI classification:	2.
Working temperature range:	-30° to +130° C.
Worked penetration (IP50):	265 - 295.
Dropping point (ASTM D2265):	190° C.
Water content:	0.1 % max.
Free acid (as oleic IP37):	0.1 % max.
Free alkali (as hydroxide IP37):	0.2 % max.
Water washout at +79° C (IP215)	3 %.
Four ball (IP239):	315 kg.
Timken OK load:	40 lbs pass.
Copper corrosion:	Negative.

Packings available:

Cartridges of 400 g in boxes of 36,
Kegs of 12.5 kg,
Kegs of 50 kg.

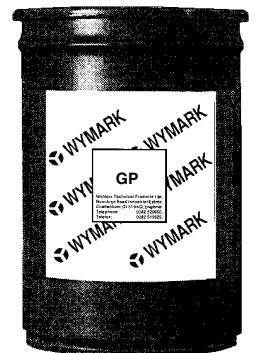

TILU01.1100A

The information provided has been carefully compiled in good faith, on the basis of experience with standard production materials produced under rigorous quality control. However, the performance figures are provided for guidance only and are not intended to constitute a guaranteed specification.